


# ActivRAC®

MOBILIZED STORAGE SYSTEM

## INFO SHEET

MOBILE SYSTEMS

### PRODUCT DECISION TREE

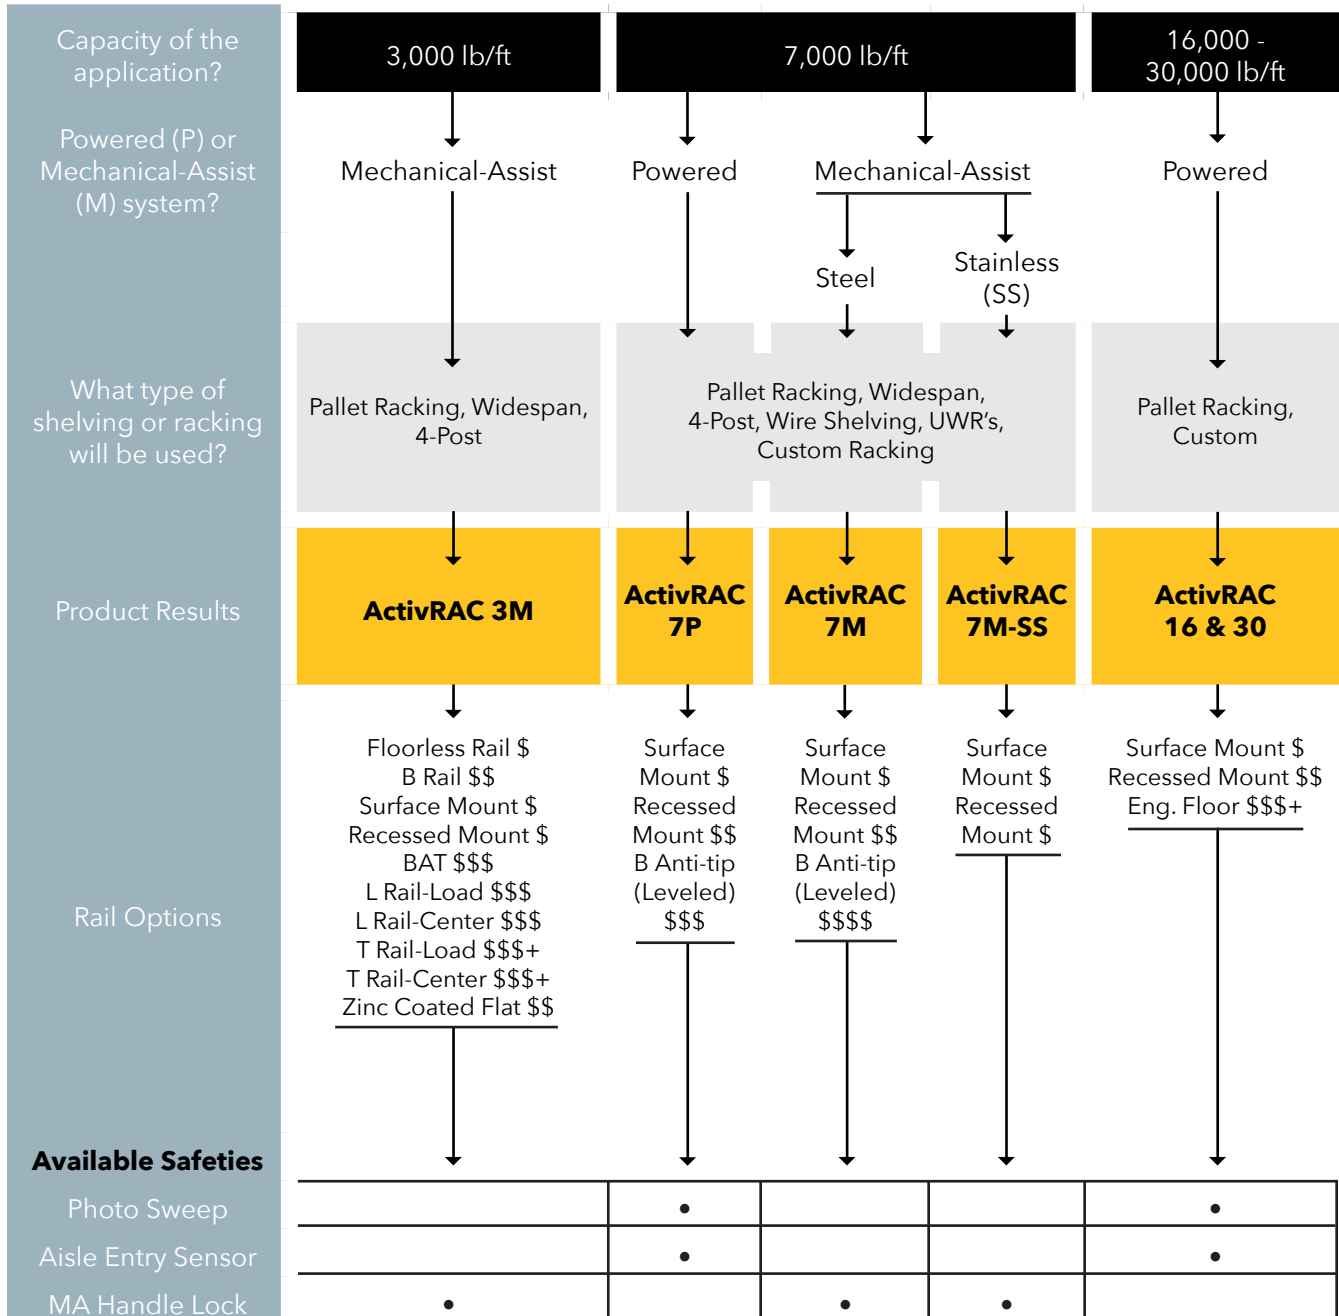



ActivRAC® Mobilized Storage systems allow you to store more in less space, free up value-generating space and better organize material use. Systems are rated to handle different load capacities and offer robust features.

	ActivRAC 3M	ActivRAC 7M	ActivRAC 7M-SS	ActivRAC 7P	ActivRAC 16	ActivRAC30
<b>DUTY RATING</b>	Light-Duty	Light- to Medium-Duty	Light- to Medium-Duty	Light- to Medium-Duty	Medium- to Heavy-Duty	Heavy-Duty
<b>MAX. LOAD CAPACITY*</b> - Single Carriage - Back-to-Back Carriage *between the rails	3,000 lbs (1,360 kg) N/A	7,000 lbs. (3,175 kg) N/A	7,000 lbs. (3,175 kg) N/A	7,000 lbs. (3,175 kg) N/A	16,000 lbs. (7,257 kg) 32,000 lbs. (14,514 kg)	30,000 lbs. (13,607 kg) 60,000 lbs. (27,215 kg)
<b>STORAGE SYSTEM</b>	Pallet racking, widespan, 4-post	Pallet racking, shelving	Pallet racking, shelving	Pallet racking, shelving	Pallet racking, shelving	Pallet racking, shelving
<b>OPERATION</b>	Mechanical-Assist	Mechanical-Assist	Mechanical-Assist	Electric Powered	Electric Powered	Electric Powered
<b>CONTROLS</b> (Standard)	3-spoked handle with rotating knob	3-spoked handle with rotating knob	3-spoked handle with rotating knob	Touch Pad Control	Touch Pad Control	Touch Pad Control
<b>MATERIAL CONSTRUCTION</b>	Steel	Steel	Stainless Steel	Steel	Steel	Steel
<b>DRIVE SYSTEM</b>	Chain & Sprocket drive	Chain & Sprocket drive	Chain & Sprocket drive	1/8 HP; 90-volt DC Synchronized Motors	1/4 HP; 90-volt DC Synchronized Motors	1/4 HP; 90-volt DC Synchronized Motors
<b>RAIL DESIGN OPTIONS</b>		Surface Mount or Recessed	Surface Mount or Recessed	Surface Mount or Recessed	Surface Mount or Recessed	Recessed with Structural Reinforcement
<b>SAFETY</b> (Standard)	Mechanical-Assist Handle Lock	Safety Lock Anti-Drift Mechanism	Safety Lock Anti-Drift Mechanism	PhotoSweep® Aisle Entry Sensor Beacon & Horn	PhotoSweep® Aisle Entry Sensor Beacon & Horn	PhotoSweep® Aisle Entry Sensor Beacon & Horn
<b>SECURITY</b> (Optional)	Carriage Lock	Carriage Lock	Carriage Lock	Keypad	Keypad	Keypad
<b>OPTIONAL</b>						
- Multiple Gear Ratios	-	•	•	-	-	-
- Power Override Unit	-	-	-	•	•	•
- Infrared Remote	-	-	-	•	•	•
- Radio Frequency Remote	-	-	-	•	•	•
- Computer Interface	-	-	-	•	•	•
- Programmable Aisles	-	-	-	•	•	•
<b>TEMPERATURE CRITERIA</b>						
- Above 32° F (0° C)	N/A	•	•	• ** +	• ** +	• ** +
- Below 32° F (0° C) to -4° F (-20° C)	N/A	•	•	• ** +	• ** +	• ** +
- Below -4° F (-20° C) to -20° F (-28.88° C)	N/A	•	•	N/A	N/A	N/A
• Controlled humidity **No frost or condensation on the system +Consult Factory						
<b>CUSTOM ENGINEERED OPTIONS AVAILABLE UPON REQUEST</b>						



Spacesaver Corporation  
1450 Janesville Avenue  
Fort Atkinson, WI 53538-2798  
800.492.3434  
www.spacesaver.com